# Lyris 110

Corded Telephone

**USER GUIDE**

## Unpacking your phone

In the box you will find:

- Base Unit
- Handset
- Coiled Handset cord
- Telephone line cord for Base unit
- User manual

Keep the packing materials in a safe place in case you later need to transport the unit.

**Keep your sales (till) receipt, which is your guarantee.**

Binatone

**If you need help ...**

The **Binatone Help Line** is available from 9.00 am to 5.00 pm, Monday to Friday, on

**0845 345 9677**

Calls are charged at Local Call rate.

## 1. Where to find it

1. **Ringer light - This flashes when the phone is ringing for an incoming call.**
2. **M1,M2 and M3 one -Touch Memory Buttons**
3. **STO (Store)button**
4. **MEM button**
5. **LNR(Last Number Redial) button**
6. **Mute button**
7. **R(Recall) button**
8. **P(Pause) button**

## 2. Installation

**1. Locating the Base unit**

The Base unit should be placed on a level surface, in a position where:

- the **telephone line cable** will reach your telephone line socket or extension socket.
- it is **not close to a sink, bath or shower**, or anywhere else where it might get wet.
- it is **not close to other electrical equipment** - fridges, washing machines, microwave ovens, TVs, fluorescent lights, etc.

**2. Plug the coiled handset cord into the Handset. Plug the other end into the jack on the left side of the Base unit.**

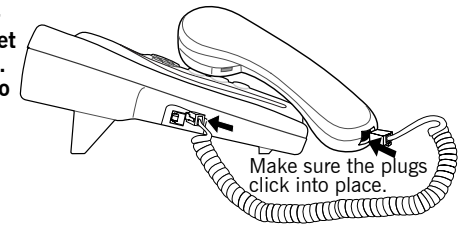


**3. Place the Handset in the Base unit.**




**Always use the telephone line cord supplied** with your Lyris 110 phone. Other telephone line cords may not work.

**4. Plug the telephone line cord free end into a modular wall jack. Press the cable into the groove so that the Base unit stands level.**

**5. Lift the Handset and check for Dial tone in the earpiece.**

## 3. Telephone Operation

**Making a call**

1. **Lift the Handset, listen for a dial tone.**
2. **Dial the telephone number you wish to call.**
3. **To end the call, return the Handset to the Base unit.**

**To answer a call**

**Lift the handset to answer call.**

**To end a call**

**Replace the Handset on the Base unit cradle.**

**Last Number Redial**

1. **Lift the Handset to redial the last number.**
2. **Press LNR button.**
   ⇨ The phone automatically dials the last number you called (maximum of 32 digits).

**Mute Function**

1. **During a call press and hold the ⊠ (MUTE) button.**
   ⇨ When the mouthpiece is muted, the person at the other end of the call cannot hear you but you can hear his side.
2. **To get back to the call, to release the ⊠ (MUTE) button.**

**Use on PBX**

If you are using your Lyris 110 phone on a PBX,and the PBX user guide tells you to press **RECALL**;

**Press R (RECALL) button on your Lyris 110 phone.**

## Telphone Operation continue...

**Inserting a Pause in the dialing sequence**

For some switchboard system, an access number must be dialed (usually an 8 or 9) to get another dial tone and an outside line.

1. **Pressing PAUSE button immediately after the access number, a pause of about 3.6 seconds will be entered, and the desired number can be dialed immediately.**
2. **Press PAUSE button to insert a pause when dialing or storing Long Distance Access Codes.**

**Storing a Number in M1,M2,M3 one-touch memories**

1 **Lift up Handset, press STO (store)button.**

2 **Key in the telephone number you wish to stored.**
⇨ Up to a maximum 15 digits.

3 **Press M1,M2 and M3 button to store the number in the selected memory.**
⇨ The largest length cannot exceed 15 digits and if exceed, the memory will not store the correct number.

**Storing a Number in (0-9) two-touch memories**

1 **Lift up Handset, press STO (store)button.**

2 **Key in the telephone number you wish to stored.**
⇨ Up to a maximum 15 digits.

3 **Press the 0-9 button to store the number in the** selected memory.

**Replace the Handset on the Base unit cradle.**

**Dial out Stored number**

**Lift up Handset, press M1,M2,M3 buttons.**

⇨The phone automatically redials numbers.

**Dial out Stored number (0-9) two-touch memories**

To dial a number stored in Two-touch memory (0-9)
- Lift up the handset.
- Press the **MEMORY** button(MEM)
- Key in the memory location number (0-9)

⇨ The number dials automatically.

## 4. Guarantee and service

The Binatone Lyris 110 is guaranteed for 12 months from the date of purchase shown on your sales receipt. The Guarantee does not cover damage by misuse or negligence, or by excessive voltages - for example, faults on the telephone line, or lightning. This does not affect your statutory rights.

**Please keep your sales (till) receipt - this is your guarantee**. You should also keep the original packaging material.

In the unlikely event that you need to return your Lyris 110 to our Repair Centre while it is under guarantee, there will be a £5 handling charge.

**While the unit is under Guarantee**

1. Disconnect the Base unit from the telephone line and the mains electricity supply.
2. Pack up all parts of your Lyris 110, using the original packaging. Remember to include the mains adapter
3. Return the unit to the shop where you bought it, making sure you take your sales receipt.

**After the Guarantee has expired**

If the unit is no longer under Guarantee, first follow steps **1** and **2** as for repair under Guarantee. Then …

3. Call our Service Department on **0845 345 9677** and ask for a quotation of the repair charge and details of where to send your Lyris 110 for repair.
4. Make sure you include with your Lyris 110:
   - your name and address.
   - a cheque or postal order for the value of the repair charge.
5. Return your Lyris 110 to the address given by the Service Department.

## 5. Technical details

| | |
|---|---|
| **Standard** | Lyris 110 Telephone |
| **Temperature range** | Operating 0 ºC to 40 ºC<br>Storage -20 ºC to 60 ºC |
| **PBX compatibility** | Timed break recall: 100 ms. Pause length: 3.6 seconds.<br><br>Signalling type: DTMF (dual-tone multifrequency) also called tone dialing. |
| **Network connection** | This equipment is intended to be used in the UK only.<br><br>Operation on other countries' PSTN termination points cannot be guaranteed. |

**BINATONE TELECOM PLC**
1 Apsley Way London NW2 7HF,United Kingdom.
Tel: +44(0) 20 8955 2700 Fax: +44(0) 20 8344 8877
e-mail: binatoneuk@binatonetelecom.co.uk

**EC Declaration of Conformity**

We the manufacturer / Importer : Binatone Telecom Plc
1 Apsley Way London
NW2 7HF, United Kingdom.

Declare under our sole responsibility that the following product

| | |
|---|---|
| Type of equipment: | Corded Phone |
| Model Name: | Lyris 110 |
| Country of Origin: | China |
| Brand: | Binatone |

complies with the essential protection requirements of R&TTE Directive 1999/5/EC on the approximation of the laws of the Council Directive 2004/108/EC on the approximation of the laws of the Member States relating to ***electromagnetic compatibility (EMC)*** and the European Community Directive 2006/95/EC relating to ***Electrical Safety.***
Assessment of compliance of the product with the requirements relating to the essential requirements according to Article 3 R&TTE was based on Annex III of the Directive 1999/5/EC and the following standard:

EMC: **EN55022:2006**
**EN55024:1998 + A1+A2**

Electrical Safety: **EN 60950-1:2006**

The product is labelled with the European Approval Marking CE as show. Any Unauthorized modification of the product voids this Declaration.

Manufacturer / Importer
(signature of authorized person)

Signature: (K.H.Mueller, CT0)

London,

Signature:

Place & Date: 8th Mar, 2009

Waste electrical products must not be disposed of with household waste. This equipment should be taken to your local recycling centre for safe treatment.

## Contents of this User Guide

1. **Where to find it**
2. **Installation**
3. **Telephone operation**
4. **Guarantee and service**
5. **Technical details**

**Pressing buttons on your phone**

- When the instructions in this user guide tell you simply to '**press** ' a button, this means that you should **press the button briefly, then release it**.
- When the instructions tell you to '**press and hold**' a button, this means you should **keep the button pressed** until the display changes and / or you hear a tone.

### Connection and conditions for use

You can connect your Lyris 110 phone to a direct exchange line (DEL) - a line connected to a local exchange, with its own phone number; to an extension socket connected to a DEL; or to an extension on an approved compatible PBX. Do not connect the Lyris 110 phone as an extension to a pay phone.

The **ringer equivalence numbers (RENs)** of all instruments (phones, fax machines, etc.) connected to an exchange line **must not add up to more than 4** - otherwise, one or more of them may not ring and/or answer calls correctly.

The Lyris 110 phone has a REN of 1, and most other telephones have a REN of 1 unless marked otherwise.

**If you need help …**
The **Binatone Help Line** is available from 9.00 am to 5.00 pm, Monday to Friday, on
**0845 345 9677**
Calls are charged at Local Call rate.